


LED indoor light without sensor - Professional Line

RS PRO LED P1 SL

V3 warm white

EAN 4007841 056056

Article number 056056



LED

30 years (Ø 4,5h / day)

3000 K

3000K warm-white



IP54



soft light start



connectable with master



energy saving

5 years

manufacturer's warranty
steinel-professional.de/garantie



CE



ENEC 05



VDE

Function description

Circular classic. Perfect shape. Perfect efficiency. The perfect indoor light as slave version without sensor. The RS PRO LED P1 SL integrates harmoniously into corridors, hallways and stairwells. It combines timeless design and extremely easy installation with pioneering technology and can be interconnected with the master version by cable. Output: 9 W with 960 lm, 3000 K.

Technical specifications

Dimensions (Ø x H)	280 x 110 mm	Photo-cell controller	No
Mains power supply	220 – 240 V / 50 – 60 Hz	Basic light level function	No
Output	9 W	Soft light start	Yes
Luminous flux	960 lm	Impact resistance	IK03
Colour temperature	3000 K	IP-rating	IP54
Colour variation LED	SDCM3	Protection class	II
Colour Rendering Index CRI	80-89	Ambient temperature	10 – 40 °C
With lamp	Yes, STEINEL LED system	Housing material	Plastic
Lamp	LED cannot be replaced	Cover material	Plastic, opal
LED life expectancy (max. °C)	50000 h	Manufacturer's Warranty	5 years
Drop in luminous flux in accordance with LM80	L80B10	With remote control	No
Base	without	Installation site	wall, ceiling
LED cooling system	Passive Thermo Control	Version	warm white
With motion detector	No	PU1, EAN	4007841056056

RS PRO LED P1 SL


V3 warm white

EAN 4007841 056056


Article number 056056



Dimension Drawing

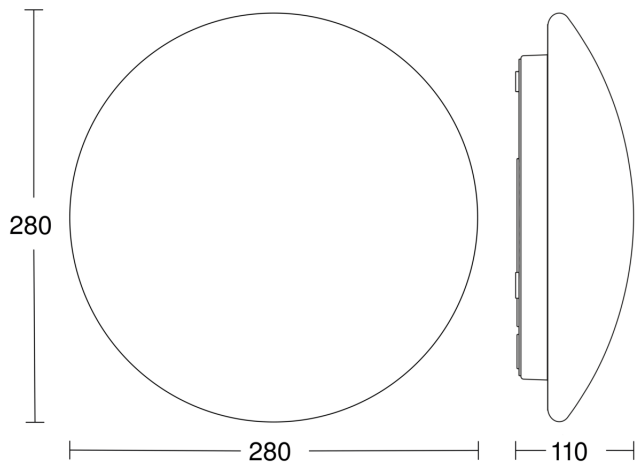


Light Distribution Curve



Output	9 W
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
Luminous flux	960 lm
Colour temperature	3000 K
Colour Rendering Index CRI	80-89
LED life expectancy (max. °C)	50000 h
LED cooling system	Passive Thermo Control

Slave/wireless master interconnection circuit diagram



Master/slave interconnection circuit diagram

