


IR Micro

DALI-2 Input Device
 EAN 4007841 057732
 Article number 057732



Function description

Small. Round. Slim. Compact, inconspicuous single workstation solution. IR Micro 360° passive infrared sensor with a presence detection zone of 4 x 4 m (presence and radial) or 6 x 6 m (tangential). DALI-2 Input Device enables sensors to communicate collected sensor data to higher-level lighting management systems (e.g. LiveLink).

Technical specifications


Type	Presence detector
Dimensions (Ø x H)	80 x 21 mm
Mains power supply	12 – 22,5 V
Power supply, detail	DALI bus
Number of Dali users	2
Sensor Technology	passive infrared
Application, place	Indoors
Installation site	ceiling
Installation	Concealed wiring
Mounting height	2,00 – 5,00 m
Reach, radial	4 x 4 m (16 m ²)
Reach, tangential	6 x 6 m (36 m ²)
Reach, presence	4 x 4 m (16 m ²)
Detection angle	360 °
Angle of aperture	160 °
Switching zones	168 switching zones
Optimum mounting height	2,8 m
Mechanical scalability	No
Sneak-by guard	Yes
Capability of masking out individual segments	No

Electronic scalability	No
Twilight setting TEACH	No
Twilight setting	2 – 1000 lx
Switching output 1, floating	No
Control output, Dali	Addressable/slave
Constant-lighting control	No
Basic light level function	No
Settings via	Bus
With remote control	No
Interconnection	Yes
Type of interconnection	Master/slave
IP-rating	IP20
Material	Plastic
Ambient temperature	0 – 40 °C
Application, room	one-person office, hotel room, care room, function room / ancillary room, WC / washroom, Indoors
Colour	white
Colour, RAL	9003
Manufacturer's Warranty	5 years
Version	DALI-2 Input Device
PU1, EAN	4007841057732

IR Micro

DALI-2 Input Device
EAN 4007841 057732
Article number 057732

Detection Zone

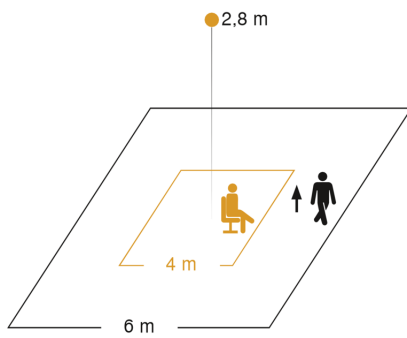

Mögliche Montagehöhe: 2,00 m – 5,00 m
Orange: Präsenz
Schwarz: tangential

Circuit diagram

