

Sensor-switched outdoor floodlight

XLED ONE Sensor

Dazzling performance! Versatile use.

The wall and ceiling floodlight with high-efficiency LED system. With 2550 lumens and flexible mounting options, this floodlight is ideally suited for illuminating carports and entrances.



The floodlight can be mounted both on the wall and on the ceiling.

3000 K

Bright light with a colour temperature of 3000 K ensures a warm white illumination of the area.








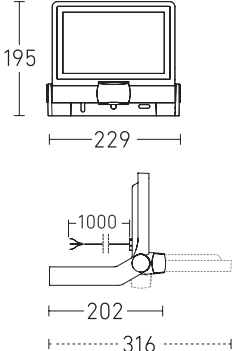


50.000 h

The LEDs have a life expectancy of up to 30 years or 50,000 hours.

Sensor-switched outdoor floodlight

XLED ONE



 <p>180° infrared sensor</p>	 <p>Reach 12 m max.</p>	 <p>2 – 2000 lx</p>	 <p>8 s – 35 min</p>	 <p>LED panel 180° vertical, Sensor 180° vertical</p>
 <p>Long-life STEINEL LED system</p>	 <p>UV resistant material</p>		<p>Technical specifications</p> <p>Dimensions (L x W x H)202 x 229 x 195 mm Mounting height max.....3.00 m Output 23.5 W Luminous flux 2550 lm / XL: 4400 lm Colour temperature 3000 K / SDCM 3 LED life expectancy (max. °C) 50000 hrs IP rating IP44 Ambient temperature -20 – +40°C Housing material Aluminium Cover material Transparent glass</p>	
 <p>High-quality aluminium</p>	 <p>Suitable for mounting on ceilings</p>	<p>Ordering details</p> <p>Anthracite 4007841 065249 Anthracite XL 4007841 065263 Anthracite (without sensor) 4007841 065201 Anthracite XL (without sensor) 4007841 065225 White 4007841 065256 White XL 4007841 065270 White (without sensor) 4007841 065218 White XL (without sensor) 4007841 065232</p>		