


Sensor-switched outdoor light

# L 585 S

white

EAN 4007841 005917

Article number 005917



|               |                         |           |      |                     |              |                |           |               |   |
|---------------|-------------------------|-----------|------|---------------------|--------------|----------------|-----------|---------------|---|
| Max. 60 W     |                         |           |      |                     |              |                |           |               | 3 years   |
| max. 60 W E27 | infrared sensor<br>180° | max. 10 m | IP44 | Sensor 70° vertical | 2 - 2000 lux | 8 sec - 35 min | ideal 2 m | energy saving | manufacturer's<br>warranty<br>steinel.de/garantie |

## Function description

Individualist all round. Outdoor SensorLight L 585 S, ideal for building fronts and entrances, 180° angle of coverage, reach up to 10 m, selectable time and twilight threshold, sensor tilts through 70° for exact adjustment of the detection zone.

## Technical specifications

|   |                                |
|---|--------------------------------|
| Dimensions (L x W x H)                        | 229 x 215 x 312 mm             |
| Mains power supply                            | 230 – 240 V / 50 Hz            |
| Mounting height max.                          | 3,00 m                         |
| Sensor Technology                             | passive infrared               |
| Output  | 60 W                           |
| Interconnection                               | No                             |
| Slave mode/selectable                         | No                             |
| With lamp                                     | No                             |
| Lamp  | All-purpose lamp               |
| Base  | E27                            |
| With motion detector                          | Yes                            |
| Detection angle                               | 180 °                          |
| Sneak-by guard                                | Yes                            |
| Capability of masking out individual segments | Yes                            |
| Electronic scalability                        | No                             |
| Mechanical scalability                        | No                             |
| Reach, radial                                 | r = 3 m (14 m <sup>2</sup> )   |
| Reach, tangential                             | r = 10 m (157 m <sup>2</sup> ) |

|                            |                   |
|----------------------------|-------------------|
| Photo-cell controller      | Yes               |
| Twilight setting           | 2 – 2000 lx       |
| Time setting               | 8 s – 35 Min.     |
| Basic light level function | No                |
| Soft light start           | No                |
| Impact resistance          | IK03              |
| IP-rating                  | IP44              |
| Protection class           | II                |
| Ambient temperature        | -20 – 40 °C       |
| Housing material           | Plastic           |
| Cover material             | Glass transparent |
| Manufacturer's Warranty    | 3 years           |
| Settings via               | Potentiometers    |
| With remote control        | No                |
| Cover material             | sticker           |
| Version                    | white             |
| PU1, EAN                   | 4007841005917     |

Sensor-switched outdoor light

# L 585 S

white

EAN 4007841 005917


Article number 005917



## Accessories

EAN 4007841 003548 Replacement glass shade for L 70X/590/535/560/585

## Detection Zone

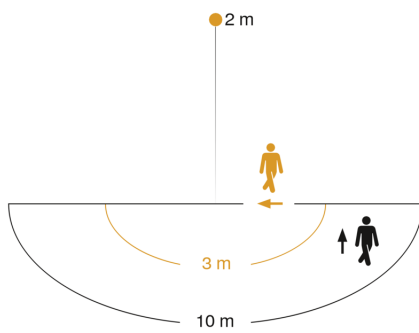

Mögliche Montagehöhe: 1,80 m – 3,00 m

Orange: radial

Schwarz: tangential

## Dimension Drawing

