

Motion detector

IS NM 360

Anthracite

EAN 4007841 049461



infrared sensor
360°



max. 8 m



Twilight switch +
eco-mode

1000w

1000 W max.



IP54



2 - 1000 lux



5 sec - 15 min



manual override



Ideal 2 m



energy saving

Function description

Motion detector and photo-electric lighting controller in one. Infrared motion detector IS NM 360, for indoors and out, ideal for building fronts and driveways, 360° angle of coverage, reach up to 8 m all round, selectable time and twilight threshold, 4 function programmes geared to practical needs, with optional manual override.

Technical specifications

Type	Motion detectors
Dimensions (L x W x H)	58 x 100 x 114 mm
Mains power supply	220 – 240 V / 50 Hz
Sensor Technology	passive infrared
Application, place	Outdoors, Indoors
Application, place, room	outdoors, front door, all round the building, terrace / balcony, courtyard & driveway
Installation site	wall
Installation	Surface wiring
Switching zones	512 switching zones
Electronic scalability	No
Mechanical scalability	No
Mounting height	1,80 – 2,50 m
Optimum mounting height	2 m
Detection angle	360 °
Angle of aperture	90 °
Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Reach, radial	Ø 8 m (50 m ²)
Reach, tangential	Ø 16 m (201 m ²)

Twilight setting TEACH	No
Twilight setting	2 – 1000 lx
Time setting	5 s – 15 min
Switching output 1, resistive	1000 W
Switching output 1, number of LEDs / fluorescent lamps	6 pcs.
Constant-lighting control	No
Basic light level function	No
Functions	4 programme settings geared to practical needs, can be selected on removable sensor module
Settings via	Potentiometers
With remote control	No
Interconnection	Yes
IP-rating	IP54
Material	Plastic
Ambient temperature	-20 – 50 °C
Colour	Anthracite
Colour, RAL	9010
Manufacturer's Warranty	3 years
Version	Anthracite
PU1, EAN	4007841049461

<https://www.steinel.de>

Motion detector

IS NM 360

Anthracite

EAN 4007841 049461




Accessories

EAN 4007841 009014

Replacement mini-sensor

Detection Zone

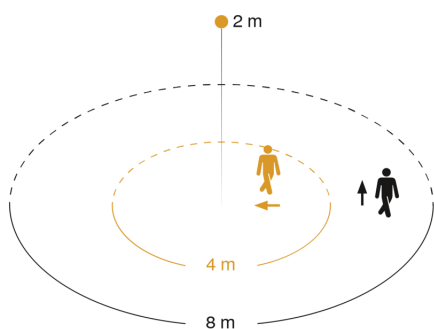

Mögliche Montagehöhe: 1,80 m – 2,50 m

Orange: radial

Schwarz: tangential